


VERTI FLOW



SLIDING PARTITIONS

A practical system that brings freshness and originality to any room. FLOW sliding walls are made up of a simple glass panel with a guide rail. You can choose from several options, from simple sliding sashes, to telescopic sashes and folding walls. All glass panels contain safety tempered glass with polished edges.



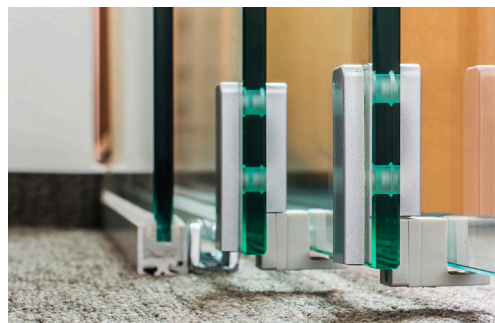

TECHNICAL PARAMETERS

Description and use	Non-load-bearing frameless sliding interior partition
Partition thickness	56–134 mm
Default module width	600–1000 mm
Default module height	3000 mm
Module connection method	Overlap of glass panels 30 or 60 mm
Connection to surrounding structures	Installation to soffit or concealed suspended load-bearing structure
Surface finish	ELOX/RAL colour
Parameters of glazed panels	Safety tempered glass with polished edge
Default door leaf size	Width 800 mm, height to full height of the partition
Glass thickness	10 mm
Door hinges	Roller carriage equipped with glass clamp grips located in the guide rail
Door forging	Handrail/door handle – according to customer requirements
Types of doors and door panels	One to two sliding sashes according to the selected system, sliding sashes, soft stop