

VERTI GUARD



FIRE-RESISTANT PARTITIONS

Special frame partitions, aimed at protection against smoke and fire, are manufactured from highly functional and high-quality materials. The system offers a variable choice of parameters and overall design including the choice of walls and doors in solid or glass modules, where you can also choose from clear and milk glass. Additional equipment includes drop rails, panic hardware, electromechanical lock, electric opener and more.






TECHNICAL PARAMETERS

Description and use	Framed interior partition with fire resistance
Wall thickness	60 or 78 mm
Default door leaf size	Single leaf door 800 × 2100 mm (maximum height 2500 mm) Double-leaf door 1600 × 2100 mm (maximum height 2500 mm)
Fire resistance/smoke resistance	Glazed partition: Wall thickness 60 mm up to EI30 Sa, Sm Wall thickness 78 mm up to EI90 Sa, Sm Solid wall: Wall thickness 60 mm up to EI30 Sa, Sm Wall thickness 78 mm up to EI60 Sa, Sm

SYSTEM DETAIL

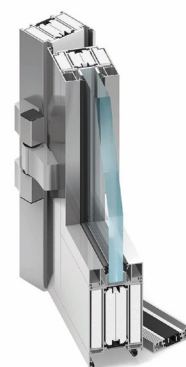

SAMPLE FLOOR PLAN

